

Operable solutions – Door Loop

The Door Loop provides power and control to a door or window unit containing View Dynamic Glass. The Door Loop installs in the upper corner of the hinged side of the door

Features:

- Flexible armored stainless steel cable conduit with metal end caps (fig. 1).
- Maximum flexibility for installation site on door/frame
- 18" armored cable with 24" IGU cable/connector pre-installed and pre-terminated.
- Uses industry standard Door Loop modified for View-specific installation.
- Tested to 1 million cycles.
- Three standard finishes available: aluminum, oil rubbed bronze and stainless steel.
- Maintains View standard BoS warranty when used in the Dynamic Glass system.

Warranty



All cables and components carry a warranty for a period of 5 years from date of delivery by View. Refer to standard warranty terms and conditions for more details.

Models available

1. VP-DL-AL-18-000
Door Loop 18"
Aluminum
2. VP-DL-BZ-18-000
Door Loop 18"
Oil rubbed bronze
3. VP-DL-BK-18-000
Door Loop 18"
Black
4. VP-DL-SS-18-000
Door Loop 18"
Stainless steel



fig. 1

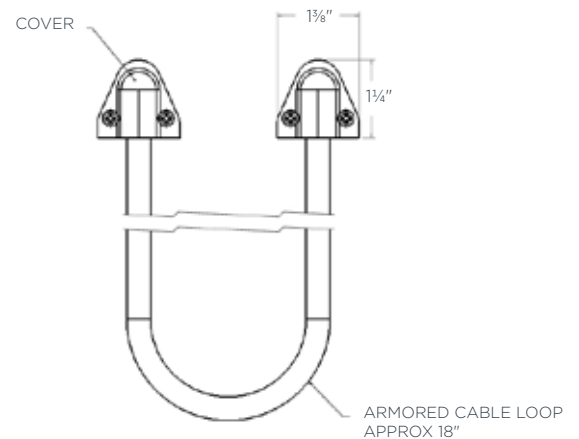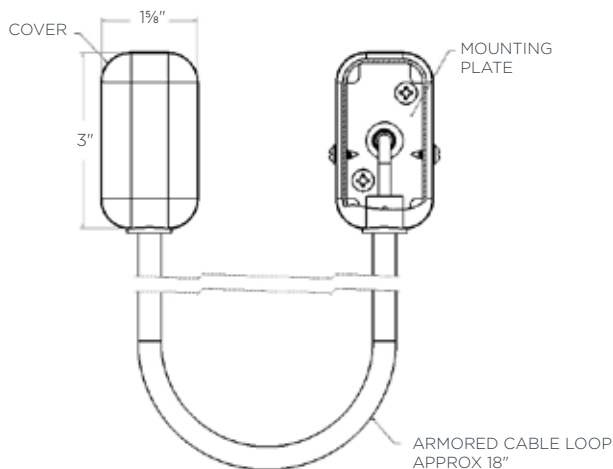

Data subject to change. See Door Loop Transfer Installation Guide for further details on dimensions and installation.

Project submittal information

JOB NAME:	NOTES:
JOB NUMBER:	