

Operable solutions – Flex Cable

The View Flex Cable provides power and control to an operable window unit containing View Dynamic Glass. Typical operable windows are casement, awning, hopper and tilt & turn. The Flex Cable installs in the upper corner of the hinged side of the window (fig. 1).

Features:

- Simply and economically provides power and control to the IGU on operable windows.
- Cycle tested to 10,000 operations—10 years of typical window operation.
- Kit comes complete with IGU cable/connector, strain reliefs, and grommets (fig. 2).
- Maintains View standard BoS warranty when used in the Dynamic Glass system, when installed according to View Installation Specifications.

Warranty

All cables and components carry a warranty for a period of 5 years from date of delivery by View. Refer to standard warranty terms and conditions for more details.

Model available

VP-FC-000
Flex cable



fig 1.

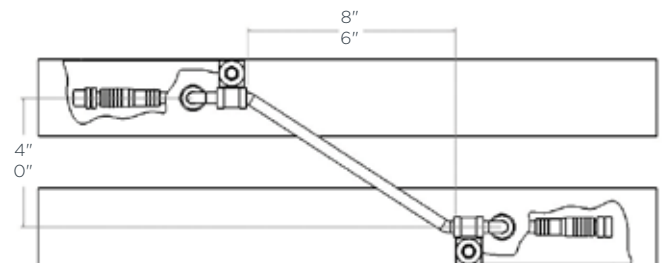


fig 2.

Data subject to change. See View Flex Cable Installation Guide for further details on dimensions and installation.

Project submittal information

JOB NAME:	NOTES:
JOB NUMBER:	