

# View Net Network Adapter

The Network Adapter (NA) provides a PoE-capable Gigabit Ethernet port that can be used to connect Ethernet-compatible devices such as View Sense.

## Features

- Fault indication
- Upgradable firmware
- Compact size
- BNC connector for coaxial cable interface
- 1000Base-T PoE port (IX connector), up to 7 W
- “IP54-rated” ingress protection

## Applications


- Provides Ethernet connectivity for Sense devices
- Provides Ethernet connectivity for IoT devices

## Installation

- The Network Adapter should be installed in an interior, accessible and climate-controlled location
- Fits within a typical 2” framing system, ceiling, utility closet or custom enclosure and operates in any orientation
- Estimated <2 minutes to install, including mounting and wiring hookup

## Warranty

The View Network Adapter carries a warranty for a period of 5 years. Refer to standard warranty terms and conditions for more details.

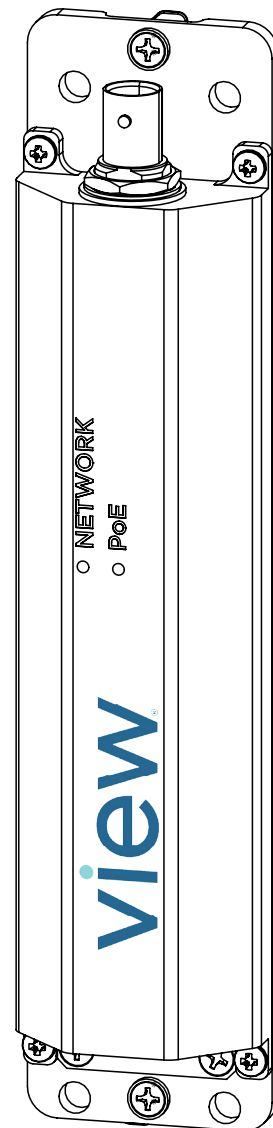

## Network Adapter Specifications

Power	
Peak Power	18 W
Input Voltage	36 V - 56 V
Max Input Current	700 mA
Typical Power	3 W (without any device connected to PoE)
Typical Input Voltage	48 V

Inputs/Outputs	
Network	BNC female
PoE	1000Base-T, IX connector jack

Physical	
Dimensions	1" x 1.63" x 8.00"
Weight	4.0 oz (126 gr)

Environmental	
Operating Temperature	5°C to 40°C
Storage Temperature	-40°C to 65°C
Relative Humidity	0 to 90% non-condensing
Ingress Protection	IP54

Codes and Standards	
Complies With FCC Part 15 Subpart B	
Conforms to Article 725.41 (A) Class 2	

Ordering Information	
Model Number	VN-NA

